

PHOTOGRAPHS


PHOTOGRAPH #1



**BUILDING 8  
SECTION D**

Stucco Sub-Contractor has completed installation of stucco accessories and metal lathing for application of specified new Stucco.

PHOTOGRAPH #2

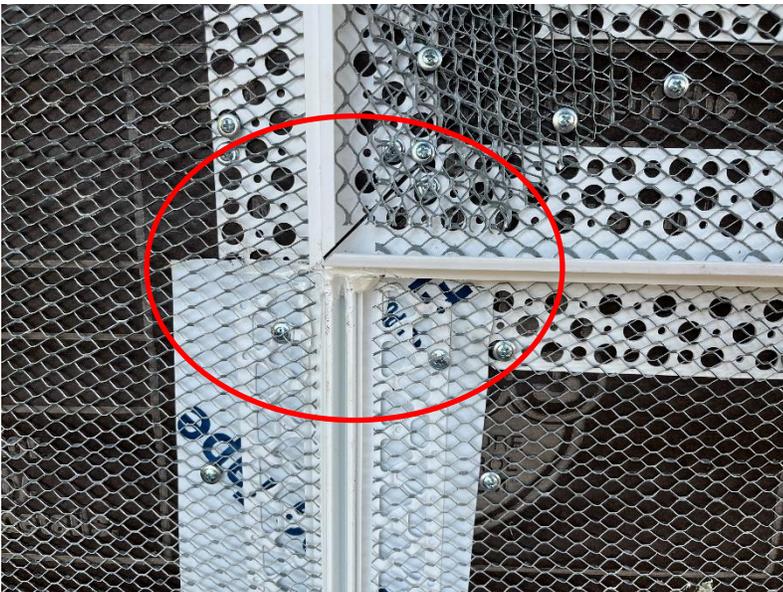

**BUILDING 8  
SECTION D**

New urethane sealant installed at all stucco accessory corner and butt joint transitions.

**PHOTOGRAPH #3**



**BUILDING 8  
SECTION D**

Self-Furring Galvanized metal lathing attached to framing at 16" O.C. as per drawings and specifications.

**PHOTOGRAPH #4**



**BUILDING 8  
SECTION D**

Stucco subcontractor has installed vinyl vent stucco accessories over secondary water-resistant barrier and installed galvanized metal lathing as per drawings and specifications.

**PHOTOGRAPH #5**



**BUILDING 8  
SECTION C**

Stucco Sub-Contractor has completed installation of stucco accessories and metal lathing for application of specified new Stucco.

**PHOTOGRAPH #6**



**BUILDING 8  
SECTION B**

Stucco Subcontractor has applied second water vapor barrier with Super JumboTex 60.

**PHOTOGRAPH #7**



**BUILDING 8  
SECTION B**

**Unit #817** – Independent testing agency performed AAMA 502 water testing at double window with no leaks or failures.

**PHOTOGRAPH #8**



**BUILDING 8  
SECTION B**

**Unit #817** – Independent testing agency performed AAMA 502 water testing at double window with no leaks or failures.

**PHOTOGRAPH #9**



**BUILDING 8  
SECTION B**

**Unit #817** – Independent testing agency performed AAMA 502 water testing at single window with no leaks or failures.

**PHOTOGRAPH #10**



**BUILDING 8  
SECTION B**

**Unit #817** – Independent testing agency performed AAMA 502 water testing at single window with no leaks or failures.

**PHOTOGRAPH #11**



**BUILDING 8  
SECTION A**

Stucco Subcontractor has applied second water vapor barrier with Super JumboTex 60.

**PHOTOGRAPH #12**



**BUILDING 8  
SECTION A**

Continuous vertical self-adhering Dupont straight flash applied over WRB prior to installation of new control joint accessories as per project drawings.

**PHOTOGRAPH #13**



**BUILDING 13  
SECTION H**

Contractor has removed existing stucco and sheathing exposing framing and begun performing repairs to damaged framing areas as directed by Delta in the Field.

**PHOTOGRAPH #14**



**BUILDING 13  
SECTION G**

Contractor has removed existing stucco and sheathing exposing framing and insulation for damage review. Contractor is now installing Simpson Strong Tie hardware fasteners as per drawings and specifications.

**PHOTOGRAPH #15**



**BUILDING 13  
SECTION G**

Contractor has installed new 5/8" Simpson Strong – Tie HD fasteners at base plate as per drawings and specifications.

**PHOTOGRAPH #16**



**BUILDING 13  
SECTION F**

Contractor has removed existing stucco and sheathing exposing framing and insulation for damage review. Contractor is now installing Simpson Strong Tie hardware fasteners as per drawings and specifications.


**PHOTOGRAPH #17**



**BUILDING 13  
SECTION F**

Contractor has installed new Simpson Strong – Tie #LSTA-15 Strap at stud to truss connections 48” O.C. per drawings.

**PHOTOGRAPH #18**

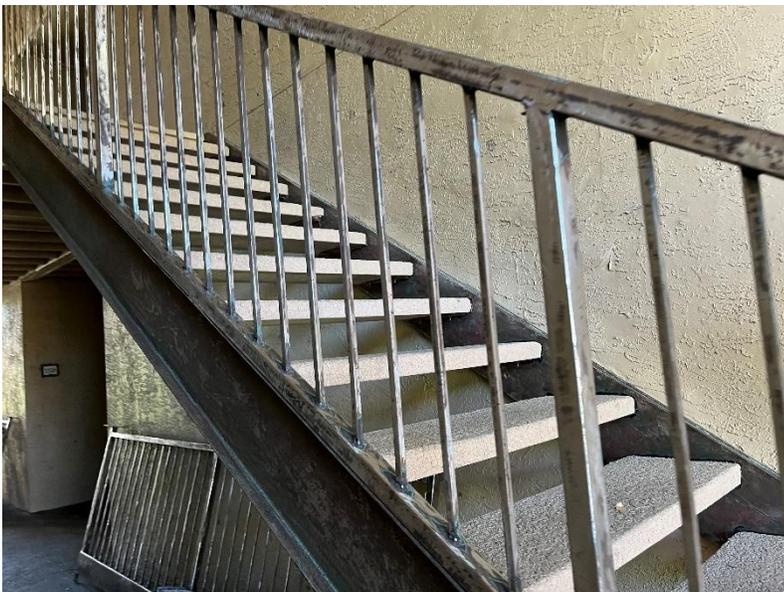

**BUILDING 13  
SECTION F**

Breezeway railings in process of surface preparation (removing loose paint and rust) with hand grinders.

**PHOTOGRAPH #19**



**BUILDING 13  
SECTION D**

Contractor has removed existing stucco and sheathing exposing framing and begun performing repairs to damaged framing areas as directed by Delta in the Field.

**PHOTOGRAPH #20**



**BUILDING 13  
SECTION C**

Contractor has removed existing stucco and sheathing exposing framing and insulation for damage review. Contractor is now installing Simpson Strong Tie hardware fasteners as per drawings and specifications.

**PHOTOGRAPH #21**



**BUILDING 13  
SECTION B**

Contractor has removed existing stucco and sheathing exposing framing and insulation for damage review. Contractor is now installing Simpson Strong Tie hardware fasteners as per drawings and specifications.

**PHOTOGRAPH #22**



**BUILDING 13  
SECTION A**

Contractor has removed existing stucco and sheathing exposing framing and insulation for damage review. Contractor is now installing Simpson Strong Tie hardware fasteners as per drawings and specifications.

**PHOTOGRAPH #23**



**BUILDING 13  
SECTION E**

Simpson Connector (HTT4) installed with Simpson Connector (Simpson Strong-Tie 5/8"x 8" Titen HD Anchors), at 24" O.C. as per drawings and specifications.